


TECHNICAL SPECIFICATIONS

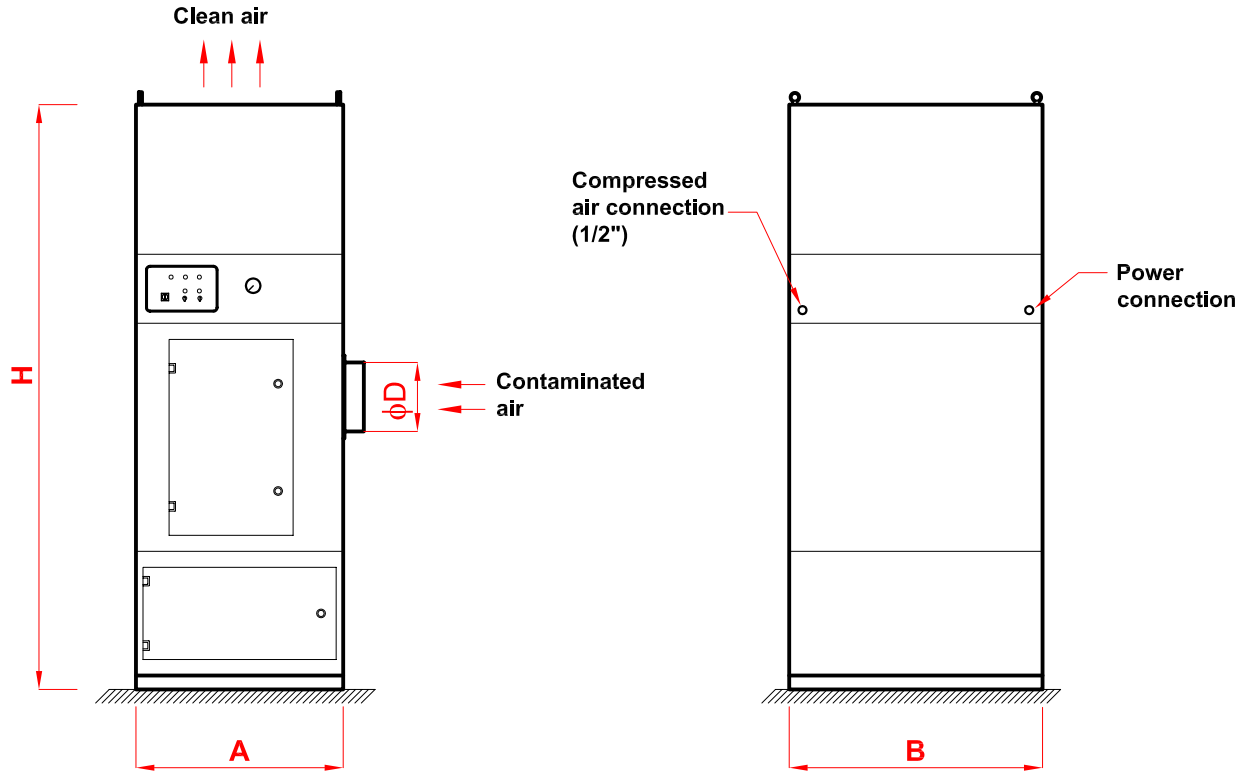

- Filter, fan and motor, automatic cleaning system with control panel is assembled in the factory and delivered. Ready to operate.
- Cartridge filters made of polyester non-woven are standart on AB dust collectors. They arrest 0.2 - 2 micron particles with %99.9 efficiency. Dust Class M acc. to DIN EN 60335. Cartridge filters have a temperature resistance up to 80 °C.
- The filter unit is equipped with automatic jet-pulse cleaning. Cleaning pressure is 4-5 bar.
- The control panel and the differential pressure gauge that start-and-stop jet pulse cleaning and dust level indicator of filter elements are standart on AB dust collectors.
- Volume of dust container is 40 lt.
- Low sound level with silencers ≤ 70 dB (A)

TYPE	CAPACITY (m ³ /h)	FAN PRESSURE (Pa)	MOTOR (kW)	FILTER SURFACE (m ²)	A x B (mm)	H (mm)	ØD (mm)	WEIGHT (kg.)
AB - 2000	2000	2800	2,2	28	900 x 900	2390	200	305
AB - 3000	3000	2600	3,0	28	900 x 900	2390	224	308
AB - 4000	4000	2600	4,0	42	900 x 900	2390	280	325
AB - 5000	5000	2800	5,5	56	900 x 1100	2540	300	390
AB - 6000	6000	3100	7,5	56	900 x 1100	2540	315	395

⊗ Ongoing product development may subject the technical specifications to alteration without notice.